DARIUS WITH HOOKS



DARIUS WITH HOOKS


Radiator Darius with hooks can only be positioned vertically.

Location of "attachment" to the wall: ψ 70 mm \uparrow 70 mm

Central heating: YES Combination heating: YES Electric heating: YES Profile: 30 × 50 mm

Connection options:



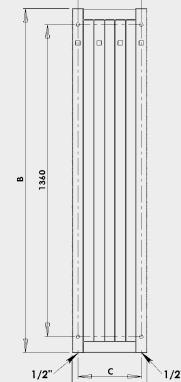

276



White coated	Other surface finish (coated)*	Width (A) x Height (B) [mm]	H0 [W] Δt 20°C**		Weight	Content	Connection span (C)	Max.recommended electric heating
			75/65°C	55/45°C	[kg]	[1]	[mm]	element [W]
DAH5W	DAH5	326 x 1500	370	192	11,1	7,9	276	200
DAH6W	DAH6	326 x 1800	444	231	13,3	9,4	276	300

^{*}Other surface finishes see page 78. **Calculation of temperature gradients can be viewed on www.pmh-co.cz.